FEATURES

• O-LATCH® MOUNTING SYSTEM

Flat panel secures to mount with a latching flag. Easy to connect/disconnect – no tools needed!

2 BOLT-DOWN SECURITY
Optional free-standing with bolt-down capability for permanent installations and security.

3 SMOOTH SWIVEL Smooth swivel up to 45° in either direction. Optional stops at 15°, 25° and 35°.

CABLE MANAGEMENT Internal routing pathways conceal cables while allowing cables to exit through back of stand or down grommet hole.



SPECIFICATIONS

Height	22.41 - 27.66" (569 - 703 mm)
Swivel	±15°, 25°, 35°
Weight Capacity	100 lbs (45.5 kg)
Colors	Black, Silver


WHAT YOU NEED TO KNOW

ORDERING OPTIONS

Available in custom and universal.

- MSSV = VESA 100 x 100 mm, 200 x 100 mm, 200 x 200 mm and 400 x 200 mm patterns
- MSSxxxx = Custom (see MountFinder[™] Pro at www.chiefmfg.com)
- MSSU = MSS + MSBU (see MountFinder Pro at www.chiefmfg.com)

TECHNICAL DRAWINGS

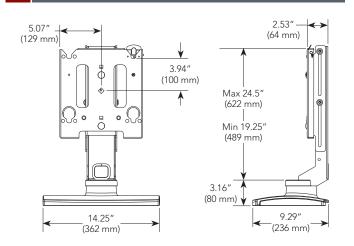

RECOMMENDED ACCESSORIES



For a complete list of flat panel mount accessories see page 83.





